



HANWHA XD26II-V MULTI-FUNCTIONAL SWISS LATHE

Call for pricing

[1-815-597-5341](tel:1-815-597-5341)



Multi-functional with B and Y2-axis

- Ultimate tooling capability adopting B-axis and Y2-axis
- Minimized thermal deformation with cooling system for Cross drilling/milling unit
- Adopted powerful built-in motor for main/subspindle (2.2/3.7 kW (Fanuc), 14.4 kW(Siemens))

SKU: N/A

Categories: [New Machines](#)

GALLERY IMAGES

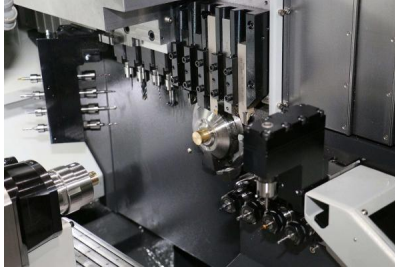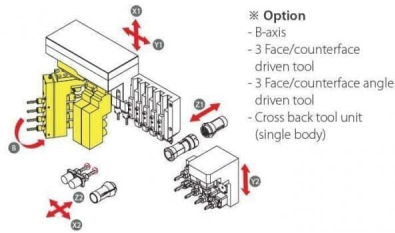

Model	XD20/26H-V		
	H	N	NH
NC	Fanuc 32i-B / Siemens 828D (B-axis 840D)		
Max. machining diameter	Ø20/26		
Z1 Stroke (mm)	210	50	210 (H), 50 (N)
Main spindle	rpm	10,000 (Ø20), 8,000 (Ø26)	
	kW	Fanuc: 2.2/3.7 (Ø20), 2.2/5.5 (Ø26) Siemens: 14.4	
OD tool	No. of tools	6 (□12mm) (Ø20), 5 (□16mm) (Ø26)	
	No. of tools	5 (ER16A, Ø25)	
Front tool	No. of tools	5 (ER16 (Ø20), ER16M (Ø26))	
	rpm	6,000	
Cross drill	No. of tools	1.0 (Fanuc), 1.02 (Siemens)	
	kW	1.0 (Fanuc), 1.02 (Siemens)	
Off-center drill (Option)	No. of tools	2 (ER16) Modular	
	rpm	8,000	
Sub spindle	rpm	2,273.7 (Fanuc), 14.4 (Siemens)	
	No. of tools	8 (ER16) (4 Fixed + 4 Driven)	
Back tool	rpm	6,000	
	kW	1.0 (Fanuc), 1.02 (Siemens)	
Machine size (L x W x H) (mm)	2,460 x 1,380 x 1,730		
Weight (kg)	2,960		
Power Consumption (Cable size)	15kVA, 18kW (VCTF 105Q x 4C)		
Air Flow rate (Liter/Min)	120 ~ 150		

* H: G/S, N: Non-G/S, NH: Convertible G/S

ADDITIONAL INFORMATION

NC	Fanuc 32i-B
Max machining diameter	Ø26 mm
Z1 stroke (mm)	210
Main Spindle Max Speed	8,000 rpm
Main Spindle Motor Power	2.2/5.5
OD Tool - No. of Tools	5 (□16mm)
Front Tool - No. of Tools	5 (ER16M)
Off-Center Drill - No. of Tools (Option)	2 (ER16) Modular
Sub Spindle Max Speed	8,000 rpm

Sub Spindle Motor Power	2.2/3.7 kW(Fanuc)
Back Tool- No. of Tools	8 (ER16) (4 Fixed + 4 Drvien)
Back Drill Max Speed	6,000 rpm
Back Drill Motor Power	1.0 kW (Fanuc)
Weight	2,900 kg
Machine Size (L x W x H)	2,460 x 1,380 x 1,730