



HANWHA XP12 AUTOMATIC SWISS LATHE

Call for pricing

[1-815-597-5341](tel:1-815-597-5341)

Cost-Effective, High-Productivity CNC Automatic Lathe


- Excellent chip discharge
 - Easy to maintain and repair
 - High productivity with the fastest-in-class traverse rate
- Efficient machining structure
 - Cover design for zero coolant leakage
 - One body control box for optimal space utilization
 - Bed designed for efficient chip discharge and coolant flow

SKU: N/A


Categories: [New Machines](#)

GALLERY IMAGES

• XP12/XP16



• XP12S/XP16S

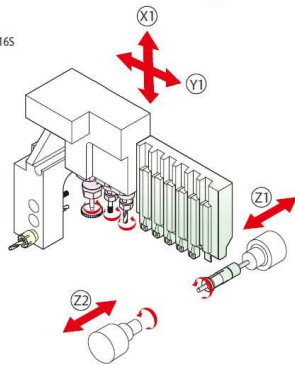

Model	XP12S	XP16S
NC	Hanwha Fanuc-i	
Max. machining diameter	Ø12	Ø16
Z1 Stroke (mm)	140	
Main spindle		
rpm	12,000	
kW	2.2/5.5	
OD tool	No. of tools	6 (∅12mm)
Front tool	No. of tools	3 (ER11, Ø20)
Cross drill	No. of tools	3 (ER11 x 2, ER16 x 1)
rpm	6,000	
Sub spindle		
rpm	8,000	
kW	0.5	
Machine size (L x W x H) (mm)	1,650 x 1,090 x 1,640	
Weight (kg)	1,800	
Power Consumption (Cable size)	10kVA, 6.7kW (VCTF 10SQ x 4C)	
Air Flow rate (Liter/Min)	120 - 150	

ADDITIONAL INFORMATION

NC	Hanwha Fanuc-i
Max machining diameter	Ø12 mm
Main Spindle Max Speed	12,000 rpm
Main Spindle Motor Power	2.2 / 5.5 kW
Cross Drill Max Speed	6,000 rpm

Cross Drill Motor Power	0.5 kW
Weight	1,800 kg
Machine Size (L x W x H)	1,800 x 1,090 x 1,640